


Typical Dome

Sample Rib Layout on Tension Ring

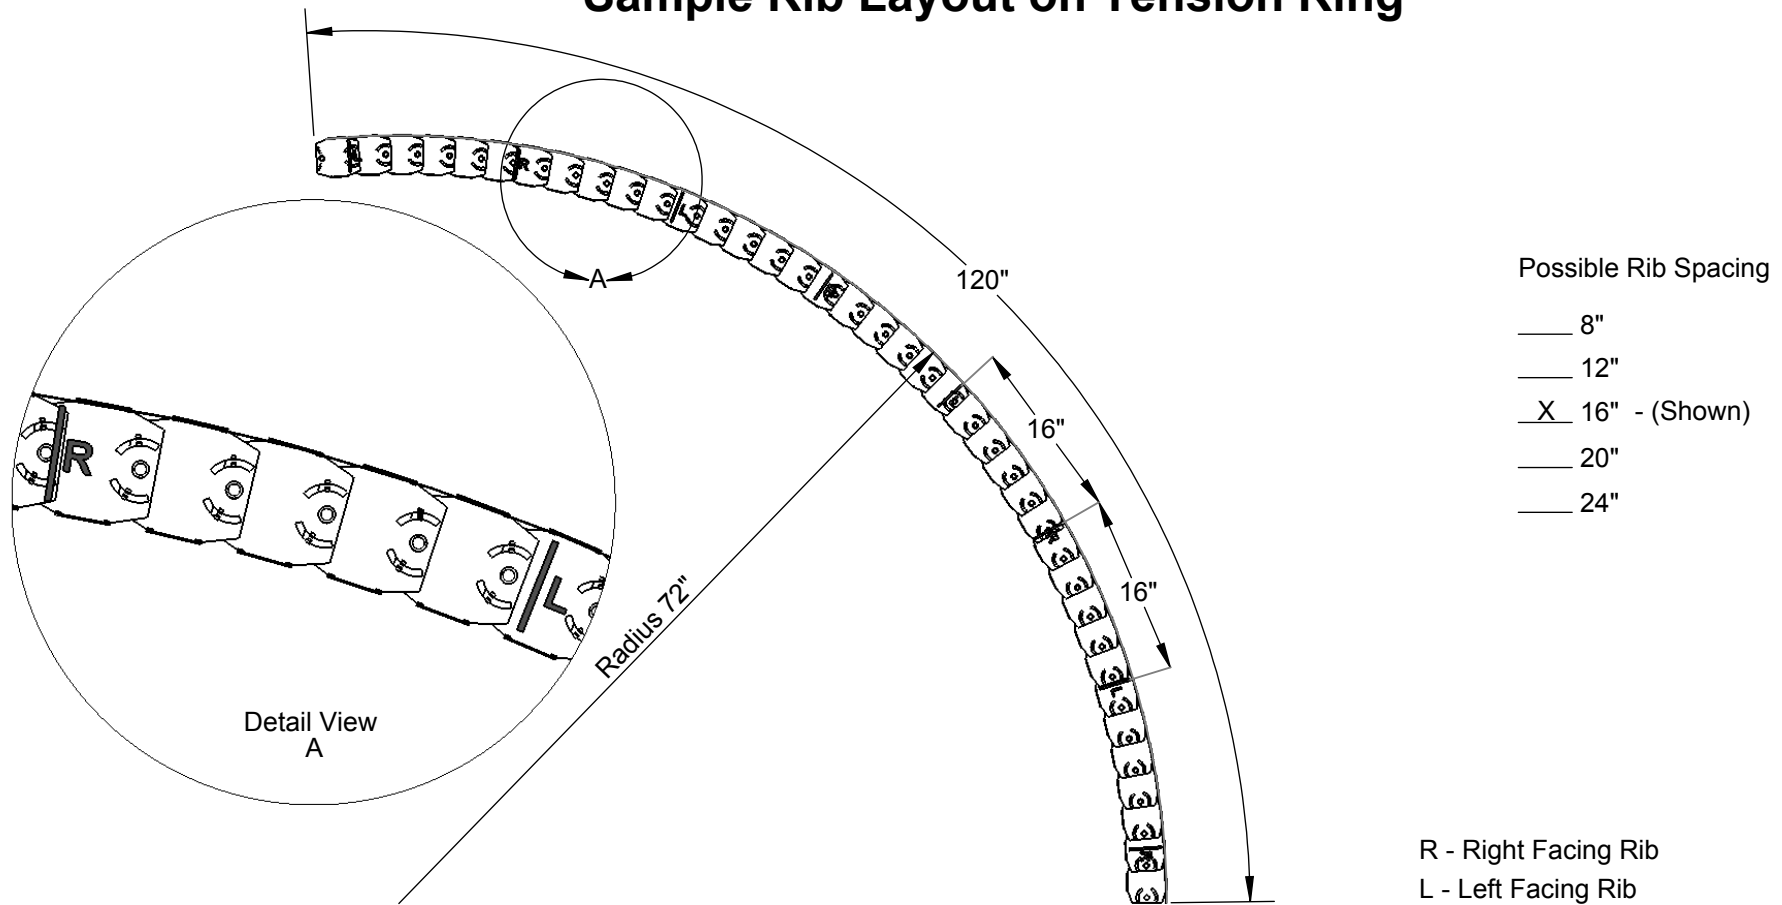

Mark Rib Spacing Layout on Tension Ring For Alternating Left And Right Facing Ribs.

Securing Methods:

The shape of 3 5/8" and 6", 20 gauge Flex-C Trac can be secured by either flattening the Hammer-Lock tabs or inserting screws through the flanges of each link on both sides of the track. For 3 5/8" and 6", 18 and 16 gauge Flex-C Trac and 16 gauge Flex-C Angle, the shape must be secured by inserting screws through the flanges of each link on both sides of the track.

FLEX-ABILITY
CONCEPTS

Distributor:	Quantity:	5500 W. Reno, Suite 300 Oklahoma City, OK 73127
Contractor:	Approved By:	Tel: 405-996-5343 Fax: 405-996-5353
Project:	Architect:	E-mail: info@flexabilityconcepts.com
Product Detail: DD5	Date:	Web: www.flexabilityconcepts.com