


Typical Dome Rib to Tension Ring Connection With Simpson Strong Tie Clip ML24

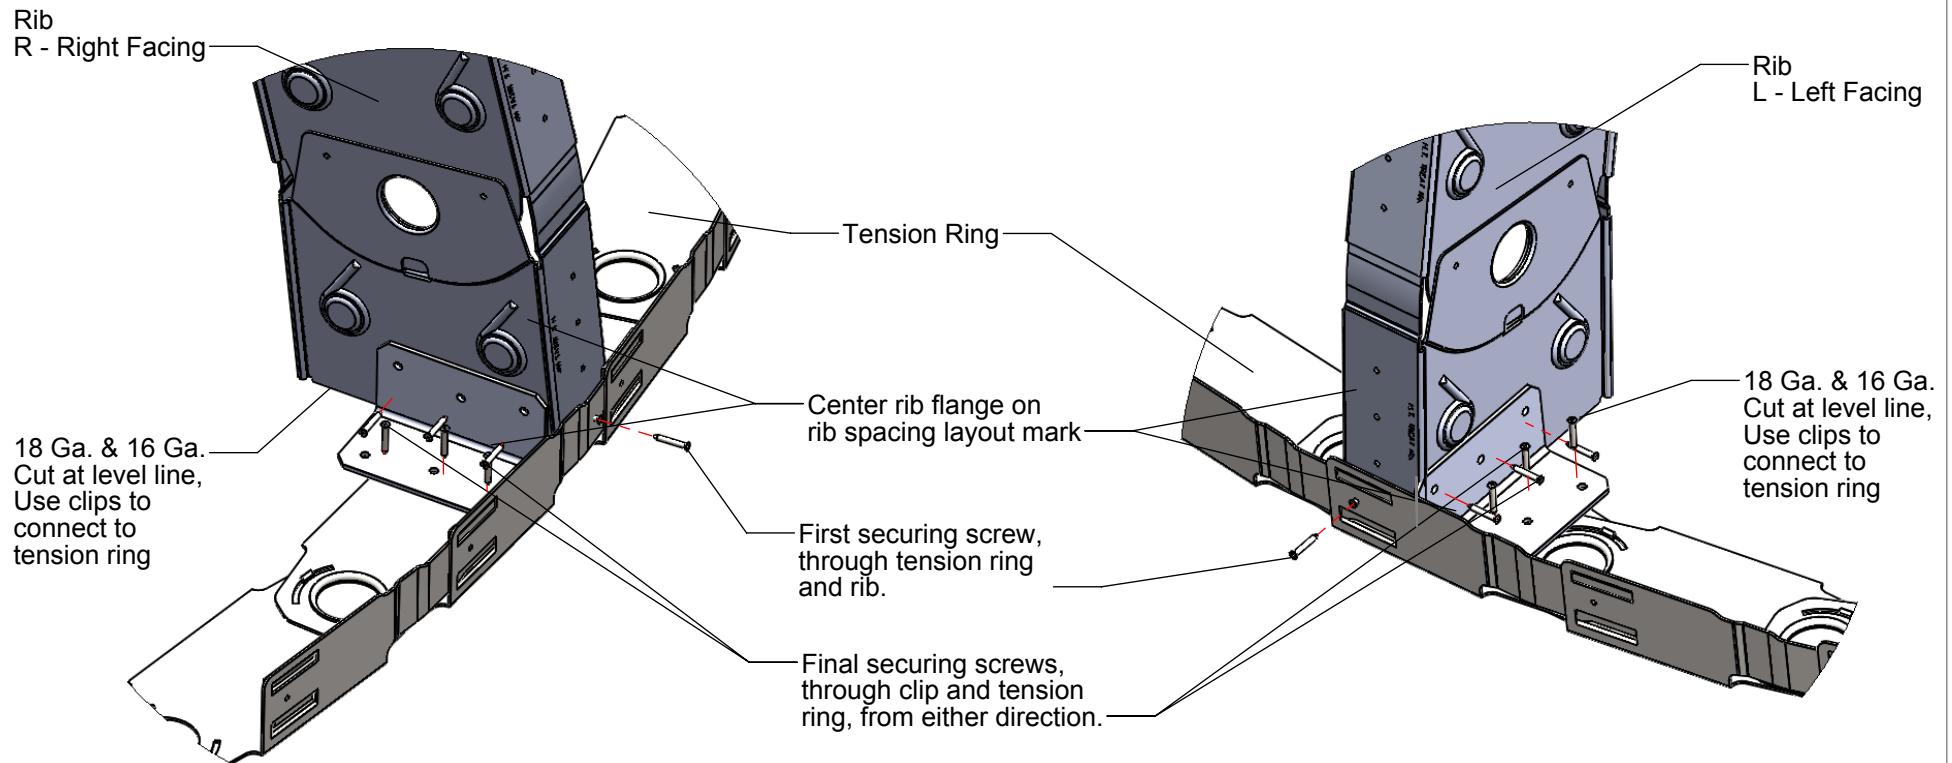

Securing Note:

The shape of 3 5/8", 20 gauge Flex-C Trac and 6", 20 gauge Flex-C Trac can be secured by either flattening the Hammer-Lock tabs or inserting screws through the flanges of each link on both sides of the track. For 3 5/8", 18 and 16 gauge Flex-C Trac as well as for 6", 18 and 16 gauge Flex-C Trac, the shape must be secured by inserting screws through the flanges of each link on both sides of the track.

**FLEX-ABILITY
CONCEPTS**

Distributor:
Contractor:
Project:
Product Detail: DD10

Quantity:
Approved By:
Architect:
Date:

5500 W. Reno, Suite 300
Oklahoma City, OK 73127
Tel: 405-996-5343 Fax: 405-996-5353
E-mail: info@flexabilityconcepts.com
Web: www.flexabilityconcepts.com