


Typical Dome Sample Rib Layout

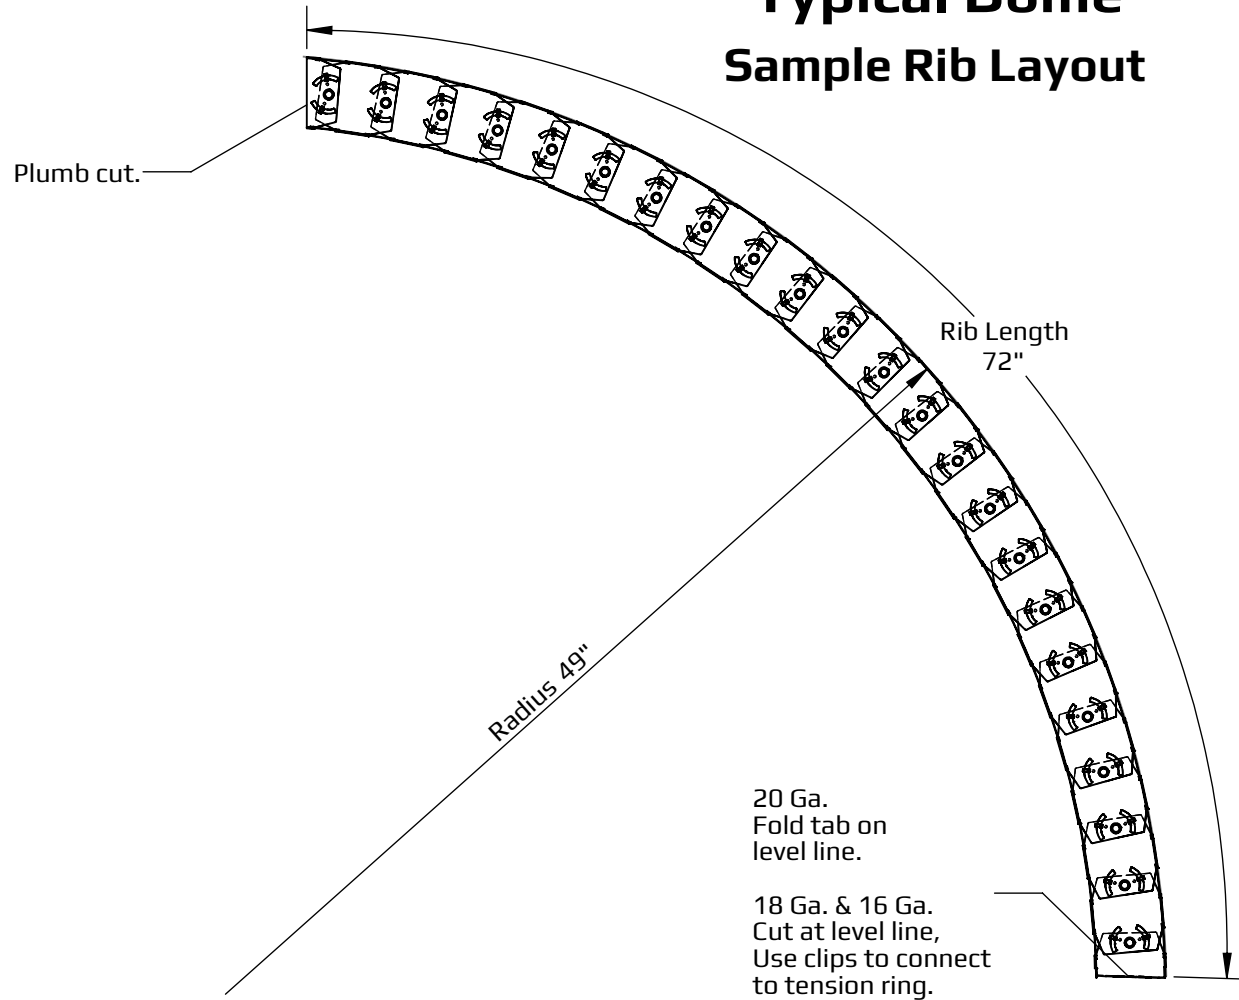

Securing Methods:

The shape of 3 5/8" and 6", 20 gauge Flex-C Trac can be secured by either flattening the Hammer-Lock tabs or inserting screws through the flanges of each link on both sides of the track. For 3 5/8" and 6", 18 and 16 gauge Flex-C Trac and 16 gauge Flex-C Angle, the shape must be secured by inserting screws through the flanges of each link on both sides of the track.

**FLEX-ABILITY
CONCEPTS**

Distributor:

Quantity:

Contractor:

Approved By:

Project:

Architect:

Product Detail: DD3

Date:

5500 W. Reno, Suite 300
Oklahoma City, OK 73127

Tel: 405-996-5343 Fax: 405-996-5353

E-mail: info@flexabilityconcepts.com

Web: www.flexabilityconcepts.com